


REFRIGERATED FROST-TOP DROP-INS



AGENCY LISTINGS



WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship with an additional four years on the compressor. For full warranty details, please refer to vollrathfoodservice.com.

CLEARANCE AND ENVIRONMENT

- Needed clearance is zero on sides, 3" (7.6 cm) from the condenser air inlet and outlet, and 1.5" (3.8 cm) at the bottom.
- Follow all regulations, warnings, and cautionary guidance specific to products that utilize R290 refrigerant.
- This unit is made for indoor use only.
- Requires at least 80 square inches for both fresh-air intake and exhaust. See back page for details.
- Frost tops are intended to hold plated, pre-chilled food and beverages for short periods of time. Frost tops are not intended for direct contact with food.

Due to continued product improvement, please consult vollrathfoodservice.com for current product specifications.

ITEMS




Item	Description
FC-4CP-02120-F	2-Pan
FC-4CP-03120-F	3-Pan
FC-4CP-04120-F	4-Pan
FC-4CP-05120-F	5-Pan
FC-4CP-06120-F	6-Pan

FEATURES & BENEFITS

- Flange and display are 300-series stainless steel.
- Units utilize R290 refrigerant, which has a lower GWP (Global Warming Potential) than many previously-used refrigerants.
- Frost-top display area is one-piece.
- Unit is designed for top-mount installation, flush with countertop.
- Under-drip-edge gasket is included.
- A full-perimeter drip edge contains spills and condensation within the stainless steel countertop area.
- Refrigeration coils are attached underneath and to the sides for maximum cooling and a full-frost pattern.
- Cooling coils are insulated with extruded polystyrene insulation for efficiency and performance.
- Display surface averages 0 °F (-18 °C) at 70 °F (21 °C) ambient temperature.
- Condensing unit is N below the top.
- Remote on/off switch with 4 ft. (1.2 m) cord, can be mounted to any cabinet side.
- 6 ft (1.5 m) cord with plug is included.


Approvals	Date

REFRIGERATED FROST-TOP DROP-INS

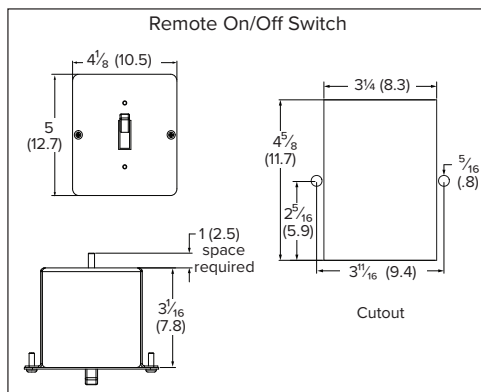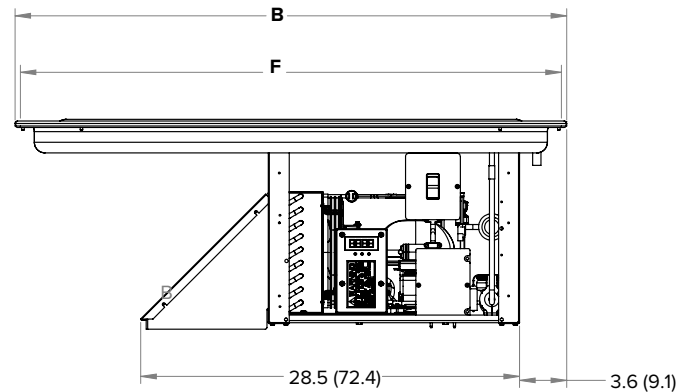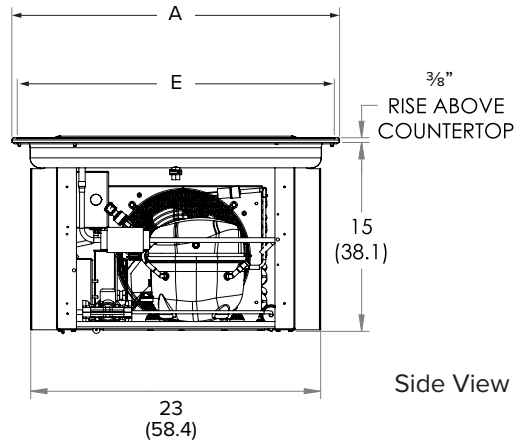

VENTING REQUIREMENTS

One customer-supplied intake and one discharge louver (two total) must be installed in the cabinet to ensure adequate ventilation; preferred locations are short ends.

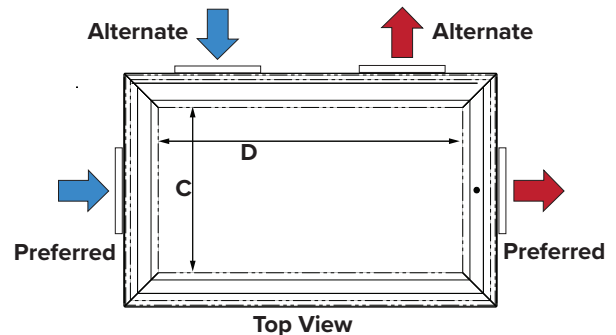

SPECIFICATIONS

Item	Pans	Dimensions						Louvers	Weight LB (Kg)	Comp. (HP)	Peak Heat of Rej. (BTUH)	Refrig. Chg. grams	V	Hz	Amps	Plug & Receptacle	
		Overall		Inner		Cutout											
		A	B	C	D	E	F										
FC-4CP-02120-F	2	26 1/16 (66.2)	28 5/16 (66.8)	22 1/4 (56.5)	25 1/4 (64.1)	27 1/2 (69.9)	8x10 (20.3x25.4)	86 (39)	1/3	4800	50	120	60	5.5	NEMA 5-15P & NEMA 5-15R Straight Blade <div><div><div></div><div></div><div></div></div><div><div>G</div><div>W</div></div></div>		
FC-4CP-03120-F	3		41 1/2 (105.4)					35 1/2 (90.2)			40 3/4 (103.5)					99 (45)	55
FC-4CP-04120-F	4		54 3/4 (139.1)					48 3/4 (123.8)			54 (137.2)					112 (50.8)	70
FC-4CP-05120-F	5		68 (172.7)					62 (157.5)			67 1/4 (170.8)					138 (62.6)	115
FC-4CP-06120-F	6		81 1/4 (206.4)					75 1/4 (191.1)			80 1/2 (204.5)					146 (66.2)	130

NOTICE: Vollrath® Drop-Ins are made to order and cannot be returned. It is the responsibility of the installer to ensure cut-outs on new installations are correct, or retrofit installation dimensions match with Vollrath product dimensions. Vollrath will not guarantee that our models retrofit with specific competitive models (as competitive specifications can change without notice). We recommend countertop cut-outs be made after receipt of the Vollrath drop-in to ensure proper fit prior to cutting into countertop materials.

NOTICE: Do NOT modify the cord or plug. Modification may damage the drop-in or cause injury, and will void the warranty.

VOLLRATH®

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Main Tel: 800.624.2051 or 920.457.4851
Main Fax: 800.752.5620 or 920.459.6573
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560

Technical Services
techservicereps@vollrathco.com
Induction: 800.825.6036
Countertop Warming: 800.354.1970
Other Products: 800.628.0832