



Outperform every day.™

# Installation Instructions

## Redco® InstaCut™ 3.5 Blade Replacement



### ⚠ WARNING

#### Sharp Blade Hazard

Blades are sharp and can cause cuts and amputation. To avoid injury from sharp blades, handle with caution. Only trained personal should operate equipment or perform maintenance.

Wash new blades with warm, soapy water and rinse thoroughly to remove the thin protective oil film. Keep the sharp edge away from you when handling blades.

1. Remove the pusher head assembly:

**Tabletop models:** Slide the pusher head off the rod guides.

**Wall mount models:** Remove the locking pin (J). Lift handle and slide the pusher head off the guide rods. Place pin back into the hole on the handle assembly to prevent loss.

2. Raise the bumpers approximately 2" (5.0 cm).
3. Loosen thumbscrew and carefully remove the blade assembly. Remove the cutting blade assembly by pressing upwards on the bottom of the side of the blade holder, where the thumbscrew is located. Discard the old blade assembly.
4. Install the new cutting blade assembly by inserting the tab on the blade holder into the groove in the base, then lowering the blade holder into the seated and flush position in the base. Tighten the thumbscrew.
5. Slide bumpers down guide rods to contact base assembly. Position pusher head assembly onto the guide rods, slowly lower pusher head assembly, and check pusher head block to blade alignment.
6. Lubricate the guide bar with mineral oil or Petrol-Gel after each use. Do not use cooking oil as it will become sticky and may permanently damage the equipment.


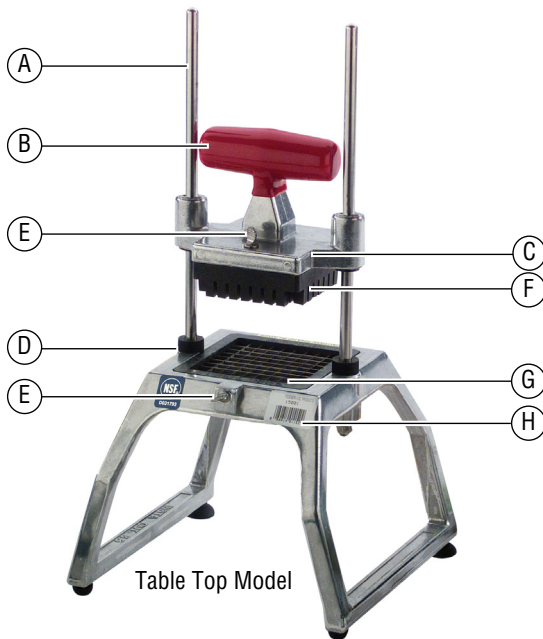


Table Top Model



Wall Mount Model

- A Guide Rods.** Guide and align the pusher head onto the blade set.
- B Handle.** Used to lower and raise the pusher head block.
- C Pusher Head Assembly.** Consists of bushings, the pusher head and the pusher block.
- D Bumpers.** Cushions the stop of the pusher head.
- E Thumbscrew.** Used to secure the pusher head block or the blade assembly.
- F Pusher Head Block.** Pushes the food product through the blade assembly. Specifically sized to match the corresponding blade assembly.
- G Blade Assembly.** Houses the blades. Specifically sized to match the corresponding pusher head block.
- H Base Assembly.** Holds the guide rods and blade assembly.
- I Locking Pin.** Secures the pusher head to the handle.
- J Locking Pin.** Secures the pusher head to the handle.

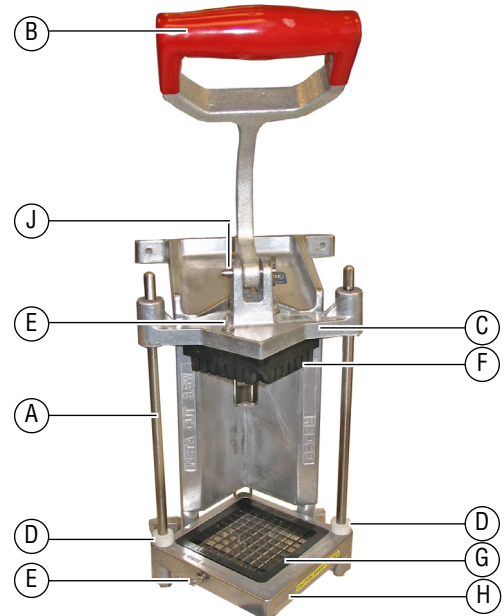

Outperform every day.™

www.vollrath.com

**The Vollrath Company, L.L.C.**  
 1236 North 18th Street  
 Sheboygan, WI 53081-3201 U.S.A.  
 Main Tel: 800.624.2051 or 920.457.4851  
 Main Fax: 800.752.5620 or 920.459.6573  
 Customer Service: 800.628.0830  
 Canada Customer Service: 800.695.8560

Technical Services  
 techservicereps@vollrathco.com  
 Induction Products: 800.825.6036  
 Countertop Warming Products: 800.354.1970  
 Toasters: 1-800-309-2250  
 All Other Products: 800.628.0832