

Project:

Item Number:

Quantity:

MODULAR DROP-IN ROUND-WELL FOOD WARMER



DESCRIPTION

The modular drop-in is designed for top-mount installation and does not require hard-wiring. A flat flange with gasket ensures firm fit against the countertop.

Stainless steel drain nipple is welded to the interior well to ensure long service life.

Stainless steel wells are designed to hold appropriate size vegetable insets and allow sufficient water capacity to ensure maximum moist heat operation.

NOTE: Unit is made to order and cannot be canceled or returned.

WARRANTY

All models shown come with a Vollrath® standard warranty against defects in materials and workmanship. For full warranty details, please refer to vollrathfoodservice.com.

AGENCY LISTINGS



INSTALLATION & CLEARANCE

NOTE: Have unit installed by a qualified person.

- Cutout section per unit specifications.
- Place provided watertight gasket over the cutout, then center the well.
- Tighten thumbscrews slowly, in an alternating pattern to evenly compress the gasket. The gasket should create a 1/8" (3 mm) gap between the well and the mounting surface.
- Plug unit into a grounded outlet matching the nameplate rating.

ITEMS & ACCESSORIES

Item	Description		
	Control	Size in Quarts	Voltage
36462	Infinite	7 ¼	120
36463			208-240
36464		11	120
36465			208-240
3646210	Thermostatic	7 ¼	120
3646310			208-240
3646410		11	120
3646510			208-240
Accessory	Description		
26806	Modular Drop-In Autofill Assembly		

NOTE: Unit is made to order and cannot be canceled or returned.

FEATURES & BENEFITS


- Double wall construction.
- Deep-drawn well is 22-gauge, 18-8 stainless steel.
- Molded breaker gasket fitted under drip-edge.
- Standard drain is 3/4" (1.9 cm) stainless steel fitting welded to pan with ball valve shutoff below exterior housing.
- Drop-in supplied with stainless steel control panel.
- Mounting brackets included.
- 500W elements for efficient low cost operation.
- Unit comes with cord and plug and does not require hard-wiring installation.
- 6-foot (183 cm) power cord.
- Unit meets NSF4 Performance Standards for hot-food holding.

Due to continued product improvement please consult vollrathfoodservice.com for current product specifications.

Approvals	Date

MODULAR DROP-IN ROUND-WELL WARMER

DIMENSIONS – INCHES (CM)

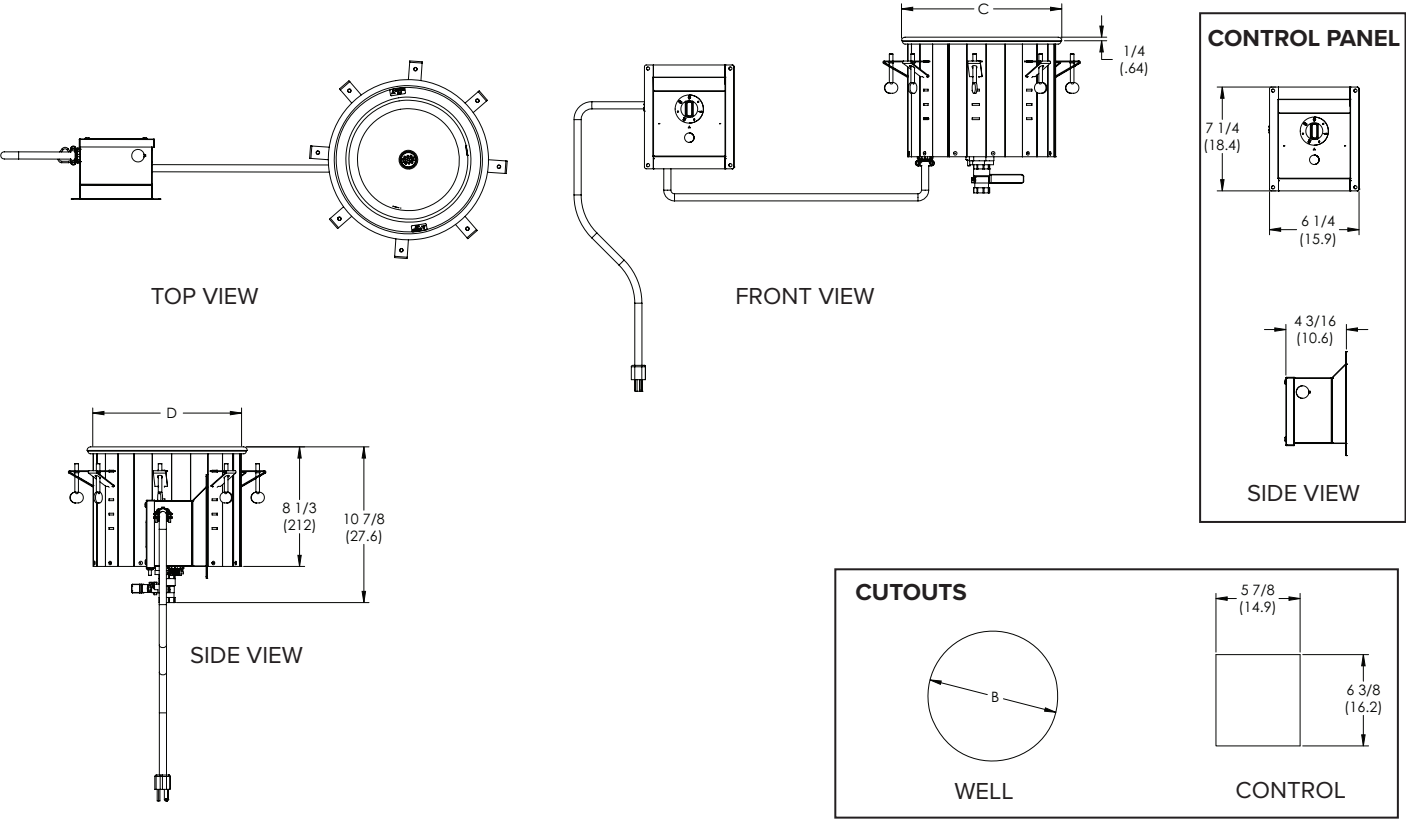


DIMENSIONS & SPECIFICATIONS

Item	Control	Capacity QT (L)	(A) Over Flange Diameter	(B) Cutout Diameter	(C) Outside Diameter	(D) Well Outer Diameter	Voltage	Watts	Amps	Plug
36462	Infinite	7 $\frac{1}{4}$ (6.9)	10 $\frac{3}{16}$ (28.4)	10 $\frac{9}{16}$ (26.8)	11 $\frac{3}{16}$ (28.4)	10 $\frac{5}{16}$ (26.5)	120	500W	4.2	NEMA 5-15P
3646210	Thermostatic									
36463	Infinite						208-240	376- 500W	1.8-2.1	NEMA 6-15P
3646310	Thermostatic									
36464	Infinite	11 (10.5)	12 $\frac{13}{16}$ (32.5)	12 $\frac{1}{4}$ (31.1)	12 $\frac{13}{16}$ (32.5)	12 (30.5)	120	500W	4.2	NEMA 5-15P
3646410	Thermostatic									
36465	Infinite						208-240	376- 500W	1.8-2.1	NEMA 6-15P
3646510	Thermostatic									

Receptacle

120V
NEMA
5-15P

208-240V
NEMA
6-15P

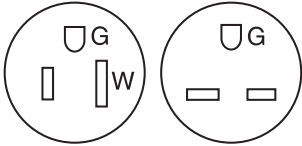

vollrathfoodservice.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Main Tel: 800.624.2051 or 920.457.4851
Main Fax: 800.752.5620 or 920.459.6573
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
© 2026 The Vollrath Company, L.L.C.

Technical Services
techservicereps@vollrathco.com
Induction Products: 800.825.6036
Countertop Warming Products: 800.354.1970
All Other Products: 800.628.0832