



Outperform every day.™

Project:

Item Number:

Quantity:

INTERNATIONAL CAYENNE® MODEL 1001 WARMERS



DESCRIPTION

Cayenne® Model 1001 Warmers are designed to attractively display and maintain the serving temperature of your prepared foods with less energy than a traditional warmer.

PERFORMANCE CRITERIA

Cayenne® Model 1001 Warmers are designed to hold heated prepared foods at temperatures above the HACCP “danger zone” of 140° F (60° C). The performance standard is measured using the NSF mixture preheated to 165° F (73.9° C). The unit will hold the temperature of this product above 150° F (65.6° C). The temperature will be maintained best when the food product is held using pans with covers, the proper water level is maintained in the well, and the food product is stirred regularly.

AGENCY LISTINGS



Due to continued product improvement, please consult www.vollrath.com for current product specifications.

ITEMS

Item No	Model No	Description
72620	1001	Full-Size Warmer, Schuko Plug
72553		Full-Size Warmer, UK Plug

FEATURES

- Features Vollrath's Direct Contact Heating System in which the heating element is in direct contact with the water for the most efficient heat transfer possible
- Cast-in non-stick aluminum dome heating element uses up to 25% less energy and reduces scale build-up for easy cleaning and longer operating life
- Thermoset fiber-reinforced self-insulating resin well provides maximum energy efficiency, prevents scale build-up and is easy to clean
- Increased water capacity reduces labor costs and improves food quality by maintaining maximum moist heat
- Recessed controls reduce accidental changes in temperature settings
- Capillary tube thermostat control supplies constant temperature and power only when needed for maximum power efficiency
- Wide dripless lip catches and drains moisture back into the well and creates more uniform fit with food pans and insets
- Stainless steel exterior meets UL surface temperature standards for operator and customer safety and concentrates heat inside the well, not to the outside surface and rim
- Non-skid feet help keep unit from sliding on countertop
- Bottom exit 6 ft. (183 cm) power cord adapts to receptacle location for safe installation and allows for 360° control placement

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

Approvals	Date

The Vollrath Company, L.L.C. Headquarters
1236 North 18th Street
Sheboygan, Wisconsin
53081-3201 USA
Main Tel: 800-624-2051 or 920-457-4851
Main Fax: 800-752-5620 or 920-459-6573
Canada Customer Service: 800-695-8560
Tech Services: techservices@vollrathco.com
www.vollrath.com

Pujadas
Ctra. de Castanyet,
132 P.O. Box 121
17430 Santa Coloma de Farners
(Girona) – Spain
Tel. +34-972-84-32-01
info@pujadas.es

Vollrath of China
Vollrath Shanghai Trading Limited
Room 201, Building A
Xin Yi Plaza
1618 Yi Shan Road
Shanghai, 201103
China, P.R.C.
Tel: +86-21-5058-9580

Vollrath de Mexico S. de R.L. de C.V.
Periferico Sur No. 7980 Edificio 4-E
Col. Santa Maria Tequexpan
45600 Tlaquepaque, Jalisco | Mexico
Tel: (52) 333-133-6767
Tel: (52) 333-133-6769
Fax: (52) 333-133-6768

INTERNATIONAL CAYENNE® MODEL 1001 WARMERS

SPECIFICATIONS

Item No.	Dimensions IN (CM)	Well Depth IN (CM)	Voltage	Watts	Amps	Plug
72620	13¾ x 21¾ x 9 (33 x 55 x 23)	6 (15.2)	230	700	3.0	Schuko
72553						UK

Receptacles




Schuko



UK

Results of Independent Testing:

Units were filled with water per care/use instructions. Units were preheated to operating temperature. 4" (100 cm) food pan containing NSF test mixture at 160° F (71.1° C) was inserted. All tests were made with the cover off. Temperature was monitored continuously for four hours.

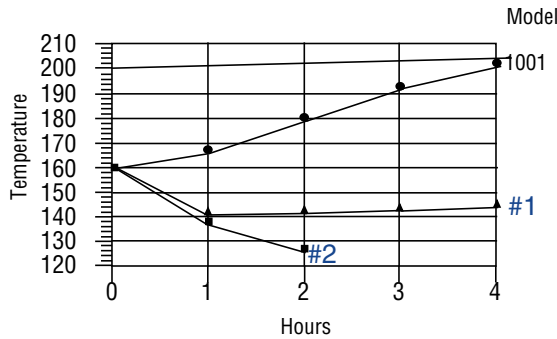

- Model 1001 with 700 watt dome element maintained temperature of the food product above the temperature 160° F (71.1° C) for the duration of the test.
- Competitive all-stainless unit (#1) with 1200W tubular element under the well. Temperature dropped below 140° F (60° C) in eight minutes. Continued testing saw temperature rise above 140° F (60° C).
- Competitive all-stainless unit (#2) with thermostatic control and 1500W tubular element under the well. Temperature dropped below 140° F (60° C) safety zone within the first hour and did not recover. Test was aborted after 2 hours.

The Vollrath Company, L.L.C. Headquarters
1236 North 18th Street
Sheboygan, Wisconsin
53081-3201 USA
Main Tel: 800-624-2051 or 920-457-4851
Main Fax: 800-752-5620 or 920-459-6573
Canada Customer Service: 800-695-8560
Tech Services: techservicereps@vollrathco.com
www.vollrath.com

Pujadas
Ctra. de Castanyet,
132 P.O. Box 121
17430 Santa Coloma de Farners
(Girona) – Spain
Tel. +34-972-84-32-01
info@pujadas.es

Vollrath of China
Vollrath Shanghai Trading Limited
Room 201, Building A
Xin Yi Plaza
1618 Yi Shan Road
Shanghai, 201103
China, P.R.C.
Tel: +86-21-5058-9580

Vollrath de Mexico S. de R.L. de C.V.
Periferico Sur No. 7980 Edificio 4-E
Col. Santa Maria Tequepexpan
45600 Tlaquepaque, Jalisco | Mexico
Tel: (52) 333-133-6767
Tel: (52) 333-133-6769
Fax: (52) 333-133-6768