

VOLLRATH®

**6-SERIES
VELOCITY
ADJUSTABLE
BREATH GUARDS**



EXPLORE

6-Series Velocity Adjustable Breath Guards

MULTIPLE PRESET POSITIONS


These accommodate NSF, full-serve, self-serve and cleaning position and ensure consistent spacing across multiple units

TEMPERED GLASS PANELS

3/8" tempered (standard), 1/2" (available)

NO PLASTIC

Stainless steel construction ensures no plastic parts to break and a consistent aesthetic of all components

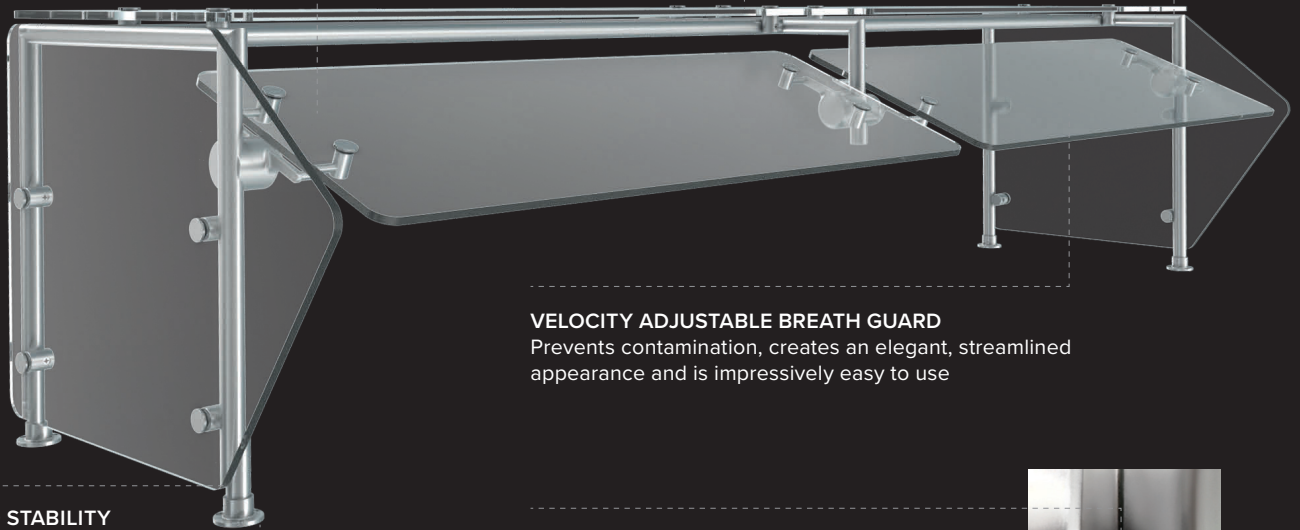

VELOCITY ADJUSTABLE BREATH GUARD

Prevents contamination, creates an elegant, streamlined appearance and is impressively easy to use

ADDED STABILITY

Welded mitered joints increase structural integrity

VISUAL NSF POSITION INDICATION

Shows when breath guard is in NSF position and eliminates the need for measuring



HEAVY-DUTY TUBING

11-gauge stainless steel tubing enables 112" span without the need for a counter-mounted center post

EASY ADJUSTMENT

Simple push-button mechanism enables single-person adjustment



CUSTOMIZABLE

All Velocity breath guards are fully customizable. Powder coated finishes are optional. LED lights and heat strips are also available.

SEVERAL STYLES

Available in single-sided buffet, double-sided buffet or cafeteria styles

SHIPPING OPTIONS

Ships assembled with glass loose. Glass assembly required.


MOUNTING CHOICES

Above-counter flange mount (standard) and below-counter mounting (available)




Velocity RS Series Breath Guard


- Standard glass is 3/8" thick with flat panel edges
- A simple lift-and-adjust mechanism allows one person to raise and lower a movable tempered glass panel to eight different positions




RS-1




RS-2




RS-3




RS-4




RS-5




RS-6



RS-7




RS-8




RS-9

Velocity QS Series Breath Guard

- Simple lift to adjust mechanism allowing one person to raise and lower a movable tempered glass panel to full serve, self serve or cleaning positions
- The angled positions are pre-set to NSF regulations that eliminates measuring
- Standard glass is 3/8" thick with flat panel edges



QS-1




QS-2



QS-3



QS-4



QS-5

Velocity ES Series Breath Guard

- Standard glass is 3/8" thick with flat panel edges
- Stationary, non-adjustable breath guard




ES-11



ES-12




ES-13



ES-14




ES-15



ES-16




ES-17



ES-18

Velocity SS Series Breath Guard


- Standard glass is 3/8" thick with flat panel edges
- Stationary, non-adjustable breath guard




SS-21



SS-22




SS-23




SS-24



SS-25




SS-26





SS-27



Velocity Mounting Options





202/1




203/1



22/1C




213/1C




Velocity Fabrication Standards and Notes

- Counter thickness and material type is required information.
- If any of the above mounts are used with a quartz or solid surface top there needs to be upper support so there is not pressure on the tops where there is penetration.
- Some mounting options may not be available on some counter and substrate combinations.
- Approved shop drawings are required prior to the start of fabrication of any breath guards.



201/A

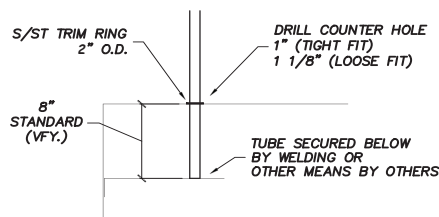

Under Counter Mount

The Vollrath Company, L.L.C.
 1236 North 18th Street, Sheboygan, WI 53081-3201
 Tel: 800-628-0830 / Fax: 800-752-5620 / Tel: 920-457-4851
 VollrathFoodservice.com

VOLLRATH