

Project:

Item Number:

Quantity:

CAYENNE® HEAVY-DUTY FLAT TOP GAS GRIDDLES



924GGM



DESCRIPTION

Vollrath's Cayenne[®] heavy-duty gas flat top gas griddles provide a simple and effective way to prepare high volumes of food in an economical, safe and hassle-free way. These griddles are ideally suited for use in steak houses, restaurants, coffee shops, clubs and pubs.

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

AGENCY LISTINGS





Due to continued product improvement, please consult www.vollrath.com for current product specifications.

ITEMS

| Item No. | Model No. | Description |
|---------------|-----------------|-----------------------|
| Heavy-Duty | Griddles | |
| 924GGM | FTG2024 | 24" Gas Griddle |
| 936GGM | FTG2026 | 36" Gas Griddle |
| 948GGM | FTG2048 | 48" Gas Griddle |
| 960GGM | FTG2060 | 60" Gas Griddle |
| 972GGM | FTG2072 | 72" Gas Griddle |
| Thermostation | cally Controlle | d Heavy-Duty Griddles |
| 924GGT | FTT2024 | 24" Gas Griddle |
| 936GGT | FTT2036 | 36" Gas Griddle |
| 948GGT | FTT2048 | 48" Gas Griddle |
| 960GGT | FTT2060 | 60" Gas Griddle |
| 972GGT | FTT2072 | 72" Gas Griddle |
| | | |

FEATURES

- · Custom stainless steel, U-shaped 30,000 BTU burners
- Burners placed every 12" (30.5 cm) for 30,000 BTU per 12" of cooking surface
- · All stainless steel exterior
- Shipped set up for natural gas, includes kit for conversion to propane
- · Includes regulator and gas valve
- Polished 1" (2.5 cm) thick, welded steel griddle plate for even heat distribution and retention, and eliminates grease and dirt traps
- Grease trays are sized to fit into a commercial dishwasher for easier cleaning
- Heavy-duty adjustable legs
- Heavy-duty 3mm thick back and side splashes contain splash and keep food on the unit
- All metal knobs and knob guards protect gas valves from damage and won't break or crack and are GUARANTEED FOR LIFE
- ¾" NPT gas inlet
- Thermostatically controlled griddles maintain user settings to ensure consistent surface temperature

CLEARANCE AND POSITIONING

This appliance must be installed adjacent to non-combustible surfaces only, with a minimum of 6" (15.2 cm) from all sides. This appliance must be a minimum distance of 6" (15.2 cm) from another appliance. The appliance must have the supplied 4" (10.2 cm) legs installed and be placed on a non-combustible surface.

| Approvals | Date | | |
|-----------|------|--|--|
| | | | |
| | | | |
| | | | |



Outperform every day.


www.vollrath.com

The Vollrath Company, L.L.C.

1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Main Tel: 800.624.2051 or 920.457.4851 Main Fax: 800.752.5620 or 920.459.6573 Customer Service: 800.628.0830

Canada Customer Service: 800.695.8560

Technical Services techservicereps@vollrathco.com Induction Products: 800.825.6036 Countertop Warming Products: 800.354.1970 All Other Products: 800.628.0832

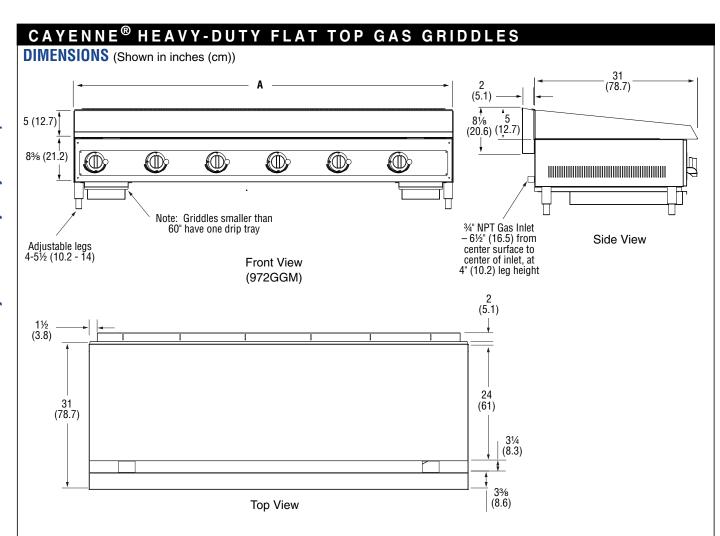

SPECIFICATIONS

| Item No. | | | | | | |
|-------------------|-------------------------|---------------|----------------------|-----------------|---------------|-------------------------|
| Manual Control | Thermostatic Control | (A) Width | Number of Burners | Output (BTU) | Pilot Type | Number of Drip Trays |
| 924GGM | 924GGT | 24 (61) | 2 | 60,000 | Standing | 1 |
| 936GGM | 936GGT | 36 (91.4) | 3 | 90,000 | | |
| 948GGM | 948GGT | 48 (121.9) | 4 | 120,000 | | |
| 960GGM | 960GGT | 60 (152.4) | 5 | 150,000 | | 2 |
| 972GGM | 972GGT | 72 (182.9) | 6 | 180,000 | | |



Outperform every day.

www.vollrath.com

The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Main Tel: 800.624.2051 or 920.457.4851 Main Fax: 800.752.5620 or 920.459.6573

Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560

Technical Services techservicereps@vollrathco.com Induction Products: 800.825.6036 Countertop Warming Products: 800.354.1970 All Other Products: 800.628.0832